


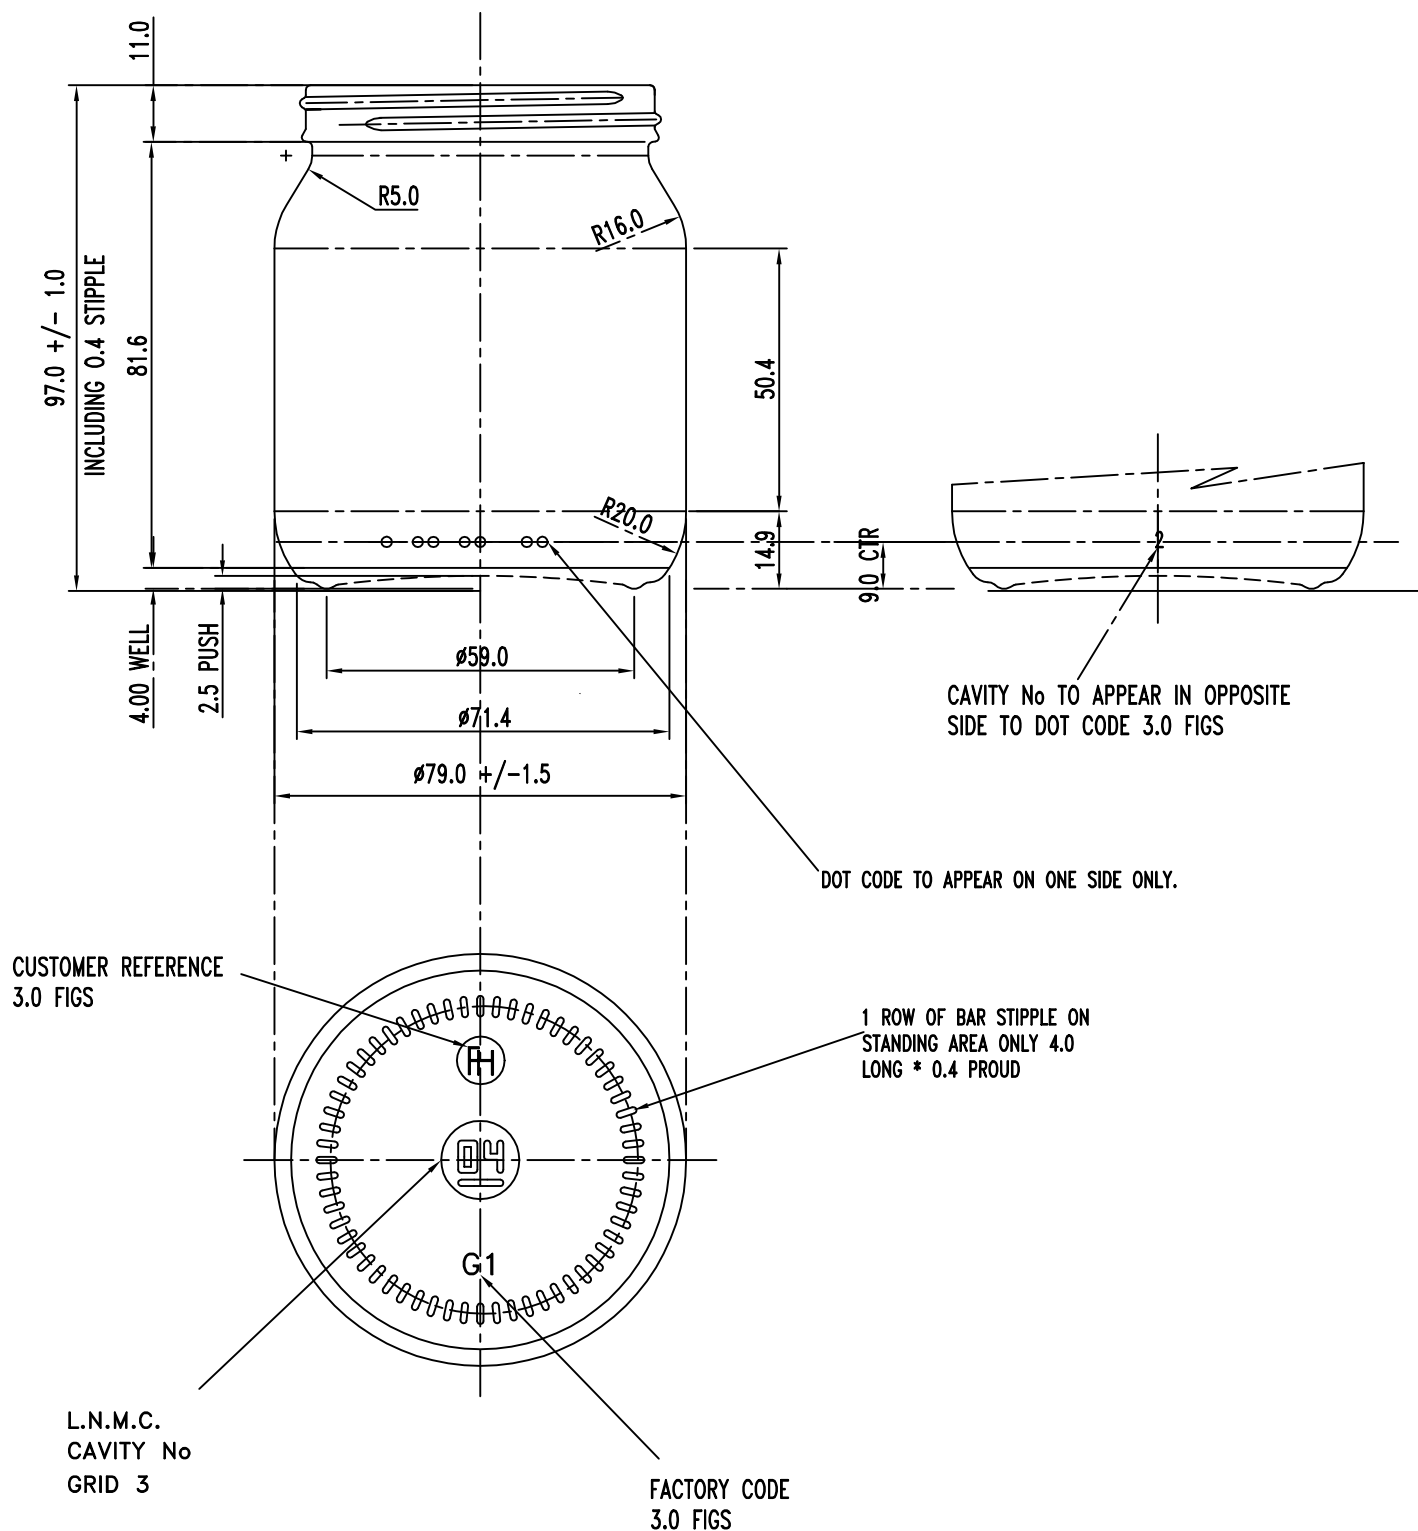

STIPULATED USE	MAX. INT. PRESSURE	NIL	THERMAL STANDARD SHOCK	VERTICAL LOAD	2000N	REFILLABLE	NO
APPROX GLASS WEIGHT	185 .0	g	GLASS COLOUR	WHITE FLINT	FINISH	70 mm R3	
CAPACITY AT FILL LINE	-----	ml	CAPACITY BRIMFULL	354.0	ml	SPEC.	GF 323
CAPACITY TOLERANCE	± 5.3	ml	M.C.	$\cup$ + OR -	-----	ml	RING NECK ϕ 64.50
FILL BELOW TOP	-----	mm	VACUITY TO BRIM (EXCLUDING FITMENT OR CORK)	-----		RING REF.	RC 1095
SPECIFICATION No.	G480-1095		PROPOSAL No.		COATING/COLOUR	NO	
CONTAINER	1 lb JAR HONEY M.O.A.		MOULD No	G480			

REVISIONS	6	
	5	
	4	
	3	
	2	20-03-03 A.H. LNNC ADDED UPDATED TO LATEST STANDARDS DRG NO WAS 12112-CS
	1	28-02-95 G.N. DOT CODE ADDED
THIS DESIGN REMAINS THE PROPERTY OF ALLIED GLASS CONTAINERS Ltd. AND SHOULD NOT BE COPIED IN PART OR WHOLE WITHOUT PRIOR WRITTEN AGREEMENT		
BRITISH GLASS TOLERANCES APPLIED.		CAD REF: G480-1095
TOLERANCED SIZES ARE FOR CONTAINER CONTROL		
CONSTRUCTION SIZES ARE FOR MOULD MAKING GUIDE		
CAPACITY TOLERANCE APPLIES TO BULK TEST MEAN OF 12		
OR MEAN RANGE METHOD FOR MEASURING CONTAINERS		
FILL LINE IS MEASURED CENTRALLY INSIDE FROM TOP		
DRAWN	D.W.	CHECKED A.H.
DATE	18.07.93	SHEET OF
COMPUTER CODE	G480-1095	